

TX-SR804

THX™ Select2™ CERTIFIED 7.1-CHANNEL A/V SURROUND HOME THEATRE RECEIVER

ONKYO
IMAGINATIVE SIGHT & SOUND



Available in Silver or Black



Remote Control

Driving Home Theatre with Pinpoint Accuracy, Potent Power and Multi-Entertainment Options

To create an A/V home theatre receiver of exceptional quality, the challenge lies in incorporating the delicate processing circuits and amplifier components into the same chassis. When they both draw on the same power source, the amplifier dominates at peak moments. In a good design, it all works smoothly—as with the THX Select2 certified TX-SR804 7.1-channel A/V surround home theatre receiver. You have video switching and upconversion through HDMI (version 1.1) and component video enabling an effortless, high-bandwidth transfer of video and audio signals to the latest HDTV displays. Also, the inclusion of a Time Base Corrector (TBC) will effectively prevent any picture deterioration caused by timing inaccuracies. With numerous other features that help the TX-SR804 to stamp its class—Wide Range Amplifier Technology (WRAT); Vector Liner Shaping Circuitry (VLSC); multizone playback with a 12 V trigger; a wide-ranging crossover adjustment; RS232 & IR connectivity; and iPod integration—this receiver stands out for its seamless, powerful functionality.

HDMI and Component Video Upconversion for HDTV Connectivity with Video Switching Capabilities

As the most advanced interface for transporting both uncompressed high-definition (HD) video and uncompressed multi-channel audio in all HD formats including 720p, 1080i and 1080p, HDMI has become the most desirable connectivity option for home entertainment. This is superbly demonstrated with the TX-SR804. Its two HDMI (version 1.1) inputs will receive pristine video from HDMI-enabled components like DVD players or set-top boxes for a single-cable output to a display device with an HDMI or DVI connection. If that's not enough, it'll also upconvert any other source connected by component, S-Video or composite connections. In effect, you have the power to accommodate all your entertainment needs, from digital recording to spectacular gaming. And if your HDTV doesn't have HDMI capability, or you have yet to take the plunge, you can use the HD-quality component video connections (also with upconversion) to get the best video images available.

THX™ Select2™ Certified and THX™ Surround EX™

With THX Select2 certification, the TX-SR804 demonstrates that it has met the rigorous design and performance standards set by THX. For the end user, it enhances the overall system's ability to accurately present movies the way they were mixed by the filmmaker on the dubbing stage and its additional THX listening modes enhance playback performance of music, movies and video games. Furthermore, its Adaptive Speaker Array (ASA) technology optimizes playback of multi-channel movies, music and video games. THX Select2 also includes the THX Surround EX decoder, which enables sound mixers to encircle the audience with 360-degree pans and more realistic fly-over and ambient sound effects.

Vector Linear Shaping Circuitry (VLSC) for All Channels

The TX-SR804 incorporates Onkyo's VLSC, which employs a unique D/A conversion circuit to mitigate the effect of signal noise. As noise is magnified during the conversion process, even minimal amounts of noise can adversely affect audio quality. With VLSC, data is converted between the sampling points and these discrete sampling points are joined with analog vectors in real-time to produce a smooth output wave form. The result—a noiseless, smooth analog signal based on the digital source.

Access to the Most Advanced Surround Sound Formats

The TX-SR804 has the onboard codecs—Dolby Digital EX, Dolby Pro Logic IIx, DTS-ES, DTS 96/24 and DTS Neo:6—to effectively reproduce stereo and multichannel sources in enveloping 6.1 or 7.1 surround sound. By connecting an HD-DVD or Blu-ray Disc player with 5.1- or 7.1-line level outputs to the TX-SR804's 7.1-multichannel inputs, you will be able to enjoy the full potential of high-definition audio formats like Dolby Digital Plus, Dolby True HD, DTS-HD and Master Audio.

Multiroom Playback Capabilities through Powered Zone 2 with 12 V Trigger

Powered Zone 2 gives you the option of different sources throughout your home. With the Powered Zone 2 function, you can enjoy one input source in the main room and a different source in another room through two different connection methods: using a receiver/integrated amp in Zone 2 (automatically activated by a 12 V trigger) or a pair of speakers in Zone 2. In the former method, you can enjoy 7.1 surround sound in the main room and play a different stereo source in Zone 2. With the latter method, you can use 5.1 surround sound in the main room and play a different stereo source in Zone 2.

Independent Crossover Adjustment for Bass Management


With the TX-SR804's crossover adjustment for bass management, you can independently set the frequency of your front, center, surround and surround back speakers at 40/60/70/80/90/100/120/150/200 Hz giving you greater scope to match different speakers and subwoofers to your system.

RI System and iPod Integration

The TX-SR804's Remote Interactive (RI) capability enables you to integrate different Onkyo components for control through one remote. Also, you can simply connect the iPod to the TX-SR804 through the Remote Interactive Dock for the iPod. The latest Remote Interactive Dock offers you onscreen menus, remote control, recharging capacity, and even photo/video playback.

TX-SR804

THX™ SELECT2™ CERTIFIED 7.1-CHANNEL A/V SURROUND HOME THEATRE RECEIVER

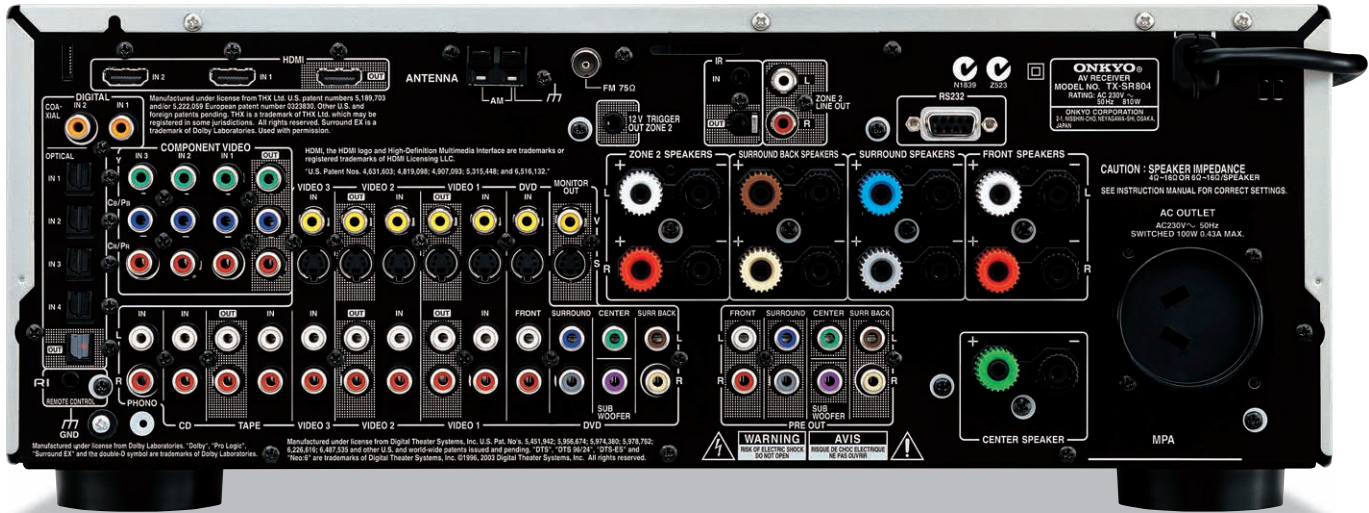

Amplifier Features

- 200 Watts per channel minimum into 6 Ω, at 1 kHz, JEITA (1 channel driven); 105 Watts per channel minimum into 8 ohms, at 20 Hz-20 kHz, FTC
- Vector Linear Shaping Circuitry (VLSC) for all channels
- Wide Range Amplifier Technology (WRAT)
- Extended frequency response (5 Hz to 100 kHz)
- Reduced NFB (Negative Feedback)
- Full bandwidth power to all 7 main channels
- Absolute ground plate
- H.C.P.S.—massive high current power supply
- Discrete power amplifier circuitry for all channels
- High-current, low-impedance 6 ohm drive for all channels
- Auto-protection circuitry
- High-grade extruded-aluminum heatsink
- Low Frequency Effect (LFE) level control
- Thick bus bars

Audio/Video Features

- THX™ Select2™ certified
- THX Surround EX, DTS, DTS 96/24, DTS-ES Discrete/Matrix, DTS Neo:6 decoding
- Dolby Digital, Dolby Digital EX, Dolby Pro Logic IIx decoding
- 192 kHz/24-bit audio DACs for all channels
- HDMI and component video upconversion with Time Base Corrector (TBC)

- Composite to S-Video upconversion
- HDTV-capable HDMI and component video (50 MHz) switching
- Optimum Gain Volume Circuitry
- Digital upsampling
- Non-scaling configuration
- Powered Zone 2/Zone 2 lineout with 12 V trigger
- A-form listening mode memory
- Independent crossover adjustment for bass management for F/C/S/SB (40/60/70/80/90/100/120/150/200 Hz)
- Advanced 32-bit processing DSP chip
- 2 HDMI (version 1.1) inputs and 1 output
- 3 component video inputs and 1 output
- 5 S-Video inputs and 3 outputs
- 5 composite video inputs and 3 outputs
- 2 audio inputs and 1 output
- Phono input
- 7 digital inputs (5 optical/2 coaxial) and 1 optical output
- Color-coded 7.1-multichannel inputs (ready for Dolby Digital and DTS formats for high-definition discs) and pre outs
- Heavy-duty, color-coded dual banana plug-compatible speaker posts
- Front panel audio, video, S-Video, optical inputs
- Dedicated line-level subwoofer pre out
- Pure audio mode
- Direct mode
- Automatic signal detection
- Late night mode (high/low/off)
- Tone control (bass/treble) for front L/R channels
- Double Bass function
- AV synchronization function (up to 250 ms)

FM/AM Tuner and Other Performance Features

- 40 FM/AM random presets
- Character input (Tuner presets, input selector)
- Outstanding selectivity and sensitivity
- IntelliVolume
- On-screen display control
- 3-mode display dimmer (bright/normal/low)
- Absolute volume display
- Calibration through Auto Speaker Set-up with Microphone
- Brushed aluminum front panel
- Headphone jack (standard size)
- Heavy-duty power cord
- Individual input selectors for each source
- RS232 port
- IR input and output
- Blue illuminated volume control
- Sleep timer via remote
- Compatible with Remote Interactive Dock for the iPod
- Backlit/Preprogrammed RI (Remote Interactive) learning remote control with 3 macros and mode-key LEDs



Black model

SPECIFICATIONS

AMPLIFIER SECTION

Power Output	
Front L/R	200 W + 200 W (6 Ω, 1 kHz, 1 channel driven, JEITA) 105 W + 105 W (8 Ω, 20 Hz-20 kHz, FTC)
Center	200 W (6 Ω, 1 kHz, 1 channel driven, JEITA) 105 W (8 Ω, 20 Hz-20 kHz, FTC)
Surround L/R	200 W + 200 W (6 Ω, 1 kHz, 1 channel driven, JEITA) 105 W + 105 W (8 Ω, 20 Hz-20 kHz, FTC)
Surround Back L/R	200 W + 200 W (6 Ω, 1 kHz, 1 channel driven, JEITA) 105 W + 105 W (8 Ω, 20 Hz-20 kHz, FTC)
Dynamic Power	
	240 W + 240 W (3 Ω, Front) 180 W + 180 W (4 Ω, Front) 125 W + 125 W (8 Ω, Front)
THD (Total Harmonic Distortion) 0.08 % (Rated Power)	
Damping Factor 60 (Front, 1 kHz, 8 Ω)	
Input Sensitivity and Impedance	
Line	200 mV/47 kΩ
Phono MM	2.5 mV/47 kΩ
Output Level and Impedance	
Rec out	200 mV/470 Ω (Tape, Video 1-2)
Frequency Response 5 Hz-100 kHz/± 1 dB, ~ 3 dB (Line)	
Tone Control ± 10 dB, 50 Hz (BASS) ± 10 dB, 20 kHz (TREBLE)	
Signal-to-Noise Ratio 106 dB (Line in, IHF-A) 80 dB (Phono in, IHF-A)	
Speaker Impedance 4 Ω/6 Ω-16 Ω	

VIDEO SECTION

Input Sensitivity/Output Level and Impedance	
Video	1 Vp-p/75 Ω (Component and S-Video Y) 0.7 Vp-p/75 Ω (Component Pb/Ca, Pb/Cb) 0.28 Vp-p/75 Ω (S-Video C) 1 Vp-p/75 Ω (Composite)
Component Video Frequency Response 5 Hz-50 MHz	

TUNER SECTION

(FM)	
Tuning Frequency Range 87.5 MHz-108 MHz	
Usable Sensitivity	
Stereo	22.2 dBf, 3.5 μV (75 Ω IHF)
Mono	15.2 dBf, 1.6 μV (75 Ω IHF)
Signal-to-Noise Ratio	
Stereo	67 dB (IHF-A)
Mono	73 dB (IHF-A)
Total Harmonic Distortion	
Stereo	0.5 % (1 kHz)
Mono	0.3 % (1 kHz)
Stereo Separation 40 dB (1 kHz)	
(AM)	
Tuning Frequency Range 522 kHz-1,611 kHz/530 kHz-1,710 kHz	
Usable Sensitivity 300 μV/m	
Signal-to-Noise Ratio 40 dB	
Total Harmonic Distortion 0.7 %	

GENERAL

Power Supply AC 220-230 V, 50/60 Hz	
Power Consumption 860 W	
Stand-by Power Consumption 0.2 W	
Dimensions (W x H x D) 435 x 173.5 x 430 mm	
Weight 13.4 kg	

Due to a policy of continuous product improvement, Onkyo reserves the right to change specifications and appearance without notice. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. THX Select 2 is a trademark or registered trademark of THX Ltd. Dolby Pro Logic, Surround EX and the double-D symbol are trademarks of Dolby Laboratories. THX Surround EX-Dolby Digital Surround EX is a joint development of Dolby Laboratories and THX Ltd. and is a trademark of Dolby. DTS, DTS-ES Extended Surround, DTS 96/24 and Neo:6 are trademarks of Digital Theater Systems, Inc. iPod is a trademark of Apple Computer, Inc., registered in the U.S. and other countries. VLSC is a trademark of Onkyo Corporation. All other trademarks and registered trademarks are the property of their respective holders.



Onkyo Corporation 2-1 Nishin-cho, Neyagawa-shi, OSAKA 572-8540, JAPAN Tel: +81-72-831-8136 Fax: +81-72-833-5222 <http://www.onkyo.com/>
Australia: Sole Distributor: Amber Technology Ltd. Unit B, 5 Skyline Place, Frenchs Forest, NSW, 2086, Sydney, AUSTRALIA, Tel: +61-2-9452-8600 Fax: +61-2-9452-8600
<http://www.ambertech.com.au> e-mail: consumer@ambertech.com.au